


## ALU - STY

### Panel's composition

**SKINS OF ALUMINIUM** prepainted in white  
 Thickness mm: 1,0



**CORE**  
 extruded Polystyrene foam  
 Density: 30 - 40 - 45 kg/m<sup>3</sup>

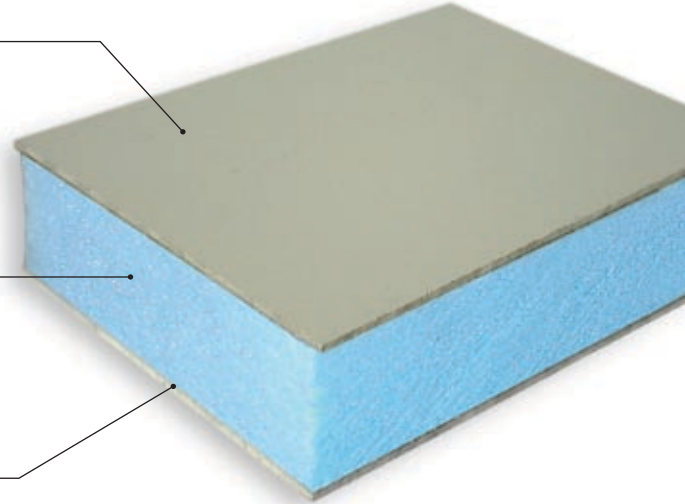

On request: • skin in different colours

EXAMPLE	Panel's weight			
	<ul style="list-style-type: none"> <li>Polystyrene foam core STY, density 30 kg/m<sup>3</sup></li> <li>Thickness starting from 20 mm to 100 mm</li> <li>Thickness' tolerance +0/-1 mm</li> <li>Dimension's tolerance ± 30 mm</li> </ul>			
	<b>Total thickness mm</b>	22	32	42
	<b>SKINS' thickness mm</b>	1,0 + 1,0		
	<b>CORE'S thickness mm</b>	20	30	40
<b>Weight kg/m<sup>2</sup></b>	7	7,3	7,6	

**Standard dimensions (max)**  
(other dimensions available on request)  
**Dimension tolerance ±30mm**

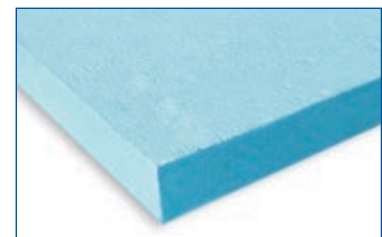

Polystyrene foam