

ISOCOP


Panel's composition

SKINS OF POLYPROPYLENE

with polypropylene-polyester film RAL 9010 and protection scratch resistant.
UV resistant

CORE

extruded Polystyrene foam
Density: 30 - 33 - 40 Kg/m³

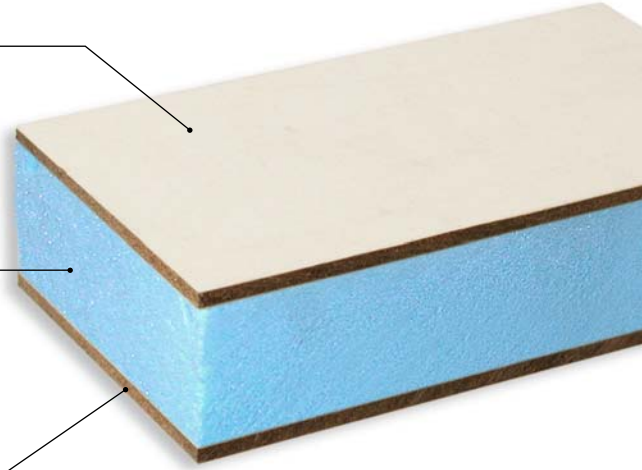


On request: •RAL colours,
•UV resistance.

Panel's weight

- Polystyrene foam core STY, density 33 kg/m³
- Thickness starting from 15 mm.
- Thickness' tolerance $\pm 0,5$ mm
- Dimension's tolerance ± 30 mm

Total thickness mm	15	20	25	30
SKINS' thickness mm	2,4 + 2,4			
CORE'S thickness mm	10	15	20	25
Weight kg/m²	6,0	6,2	6,4	6,5

Standard dimensions (max) (other dimensions available on request)



Polystyrene foam